



-30°C Biomedical ECO Freezers with Natural Refrigerants



369 L / 504 L

Stable -30°C uniform environment with extensive storage possibilities

Both units provide environmental savings and flexibility while maintaining the quality of the samples during preservation. Such flexibility includes height-adjustable shelf trays and separate top and bottom doors that prevent cold air leakage.

Natural Refrigerants and Inverter Technology

Hydrocarbon [HC] refrigerants have minimal effect on the environment and are compliant with environmental legislation for climate control. Combined with inverter technology, these refrigerants also provide more efficient cooling without compromising cooling performance, ambient tolerance and recovery speeds following door openings.

Safe & Secure Sample Storage

To securely preserve the valuable samples, multiple safety features include 2 separate doors to reduce cold air leakage when handling samples and abnormal temperature alarms (high/low) to prevent samples being exposed to temperature variations.

Height-adjustable Shelf Trays

Both units feature fully height-adjustable shelf trays, accommodating chamber containers of various sizes. Model MDF-MU339HL features a shelf width of just 447 mm, and Model MDF-MU539HL's shelf width is 624 mm.



Energy-efficient Performance

Natural refrigerants, compressors and integrated electronics combine to lower operating costs by up to 28%*. Freezer operation is managed by effectively balancing temperature performance and energy management.

* Compared to conventional models.
Power source: 220V/230V/240V 50Hz, Ambient temperature: 30°C



Versatile Alarm Function

An alarm for high/low temperatures and an error code display with a self-diagnostic function inform users of any abnormalities such as power failures for prompt actions that avoid damaging valuable samples. In addition to a standard door lock, a latch with a padlock is also available.

* Storage containers are available as an option.
Max. capacity is 6 containers per chamber, 12 in total.



Easy Disposal of Defrosting Water

Manual defrosting becomes an easy task with the drain hose that is attached to the main unit (hose usually stowed away when not in use).


-30°C Biomedical ECO Freezers with Natural Refrigerants



Performance Data


AT35°C Pull-down & Pull-up Temperature (No load)²⁾

— Pull-down [220/230/240 V, 50 Hz]
— Pull-up

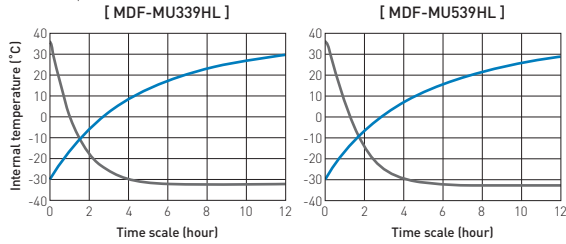


Dimensions

Unit: mm

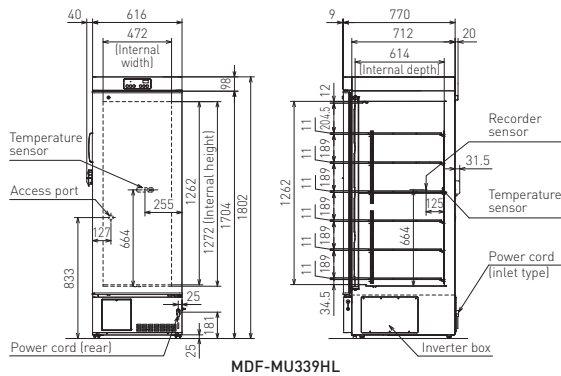

MDF-MU339HL

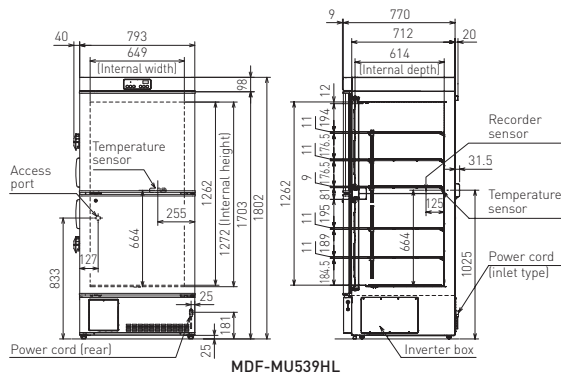

MDF-MU539HL



[220/230/240 V, 50 Hz]



Preservation Equipment, Experimental Environment Equipment, Dispensary Equipment, Culturing Equipment and Drying & Sterilising Equipment for General Laboratory use
The management of the design, development, production and servicing of the above.
PHC Corporation, Biomedical Division
1-1-1 Sakada, Oizumi-machi, Ora-gun, Gunma 370-0596, Japan



PHC Corporation Biomedical Division is certified for:
Environmental management system: ISO14001

Model Number	MDF-MU339HL-PE	MDF-MU339HL-PA	MDF-MU539HL-PE	MDF-MU539HL-PA
External dimensions (W x D x H) ¹⁾	mm	616 x 770 x 1802	793 x 770 x 1802	
Internal dimensions (W x D x H)	mm	472 x 614 x 1262	649 x 614 x 1262	
Volume	litres	369	504	
Net weight	kg	122	144	
Performance				
Cooling performance ²⁾	°C		-30	
Temperature setting range	°C		-35 to -18	
Temperature control range	°C		-30 to -20	
Control				
Controller			Microprocessor, non-volatile memory	
Display			LED	
Temperature sensor			Thermistor	
Refrigeration				
Compressor	W		400	
Refrigerant			HC	
Insulation material			PUF	
Insulation thickness	mm		70	
Construction				
Exterior material			Painted Steel	
Interior material			Painted Steel	
Outer door	qty	1	2	
Outer door lock			Yes	
Shelves	Dimensions	mm	W447 x D510	W624 x D510
Max. load - per shelf	kg		30	
Access port	qty		1	
Access port position			Back	
Access port diameter	∅ mm		30	
Casters	qty		4 [2 levelling feet]	
Accessories				
Accessories	qty		1 Key set / 1 Defrost spatula	
Alarms (V = Visual Alarm, B = Buzzer Alarm, R = Remote Alarm)				
Power failure			V-B-R	
High temperature			V-B-R	
Low temperature			V-B-R	
Electrical and Noise Level				
Power supply	V	220/230/240	115	220/230/240
Frequency	Hz	50	60	50
Noise level ³⁾	dB [A]	42		
Options				
Temperature recorders	- Circular type		MTR-G85C-PE/MTR-G85A-PA - Chart paper: RP-G85-PW - Ink pen: PG-R-PW - Recorder housing: MPR-S7-PW	
	- Continuous strip type		MTR-4015LH-PE/MTR-4015LH-PA - Chart paper: RP-40-PW - Recorder housing: MPR-S30-PW	
Storage Container	Inner dimensions	mm	MDF-03SC-PW (2 pcs/set)	MDF-05SC-PW (2 pcs/set)
			W420 x D552 x H157	W280 x D552 x H157
Optional Communication Systems				
Digital interface (RS232C/RS485) ⁴⁾			MTR-480-PW	
Ethernet interface (LAN) ⁴⁾			MTR-L03-PW	
Quality Management System				
Certification			ISO 9001	

¹⁾ External dimensions of main cabinet only, excluding handles and other external projections.

²⁾ Air temperature measured at freezer centre, ambient temperature 35°C, no load.

³⁾ Nominal value - Background noise 20 dB[A]

⁴⁾ Only for MTR-5000 (data acquisition system) users.

• Appearance and specifications are subject to change without notice.

Caution: PHC Corporation guarantees this product under certain warranty conditions. However, please note that PHC Corporation shall not be responsible for any loss or damage to the contents of the product.

DISTRIBUTED BY:



<https://www.phchd.com/global/biomedical/>

Printed in Japan 1305-2020-02-AA