



VIP ECO SMART

Natural Refrigerants Ultra-Low Temperature Freezer

-86°C to -40°C



528 L / 729 L

Cost-saving and environmentally friendly sample storage now upgraded with additional features for improved usability.


The VIP ECO SMART -86°C to -40°C upright freezer, along with conventional Password Protection, now offers Face Recognition, coupled with an Electric Lock for enhanced access control. Energy-saving is also further improved by using natural refrigerants combined with an inverter compressor.

Natural refrigerants and inverter technology

Naturally occurring hydrocarbon (HC) refrigerants have minimal effect on the environment and are compliant with environmental legislation for climate control. Combined with inverter technology, these refrigerants also provide more efficient cooling without compromising cooling performance, ambient tolerance, and recovery speeds following door openings.

New & larger control panel with multiple features

Larger display improves visibility, increasing from 7.0 Inches to 10.1 Inches (1.4 times larger in size & 1.6 times higher in resolution), compared to conventional models.

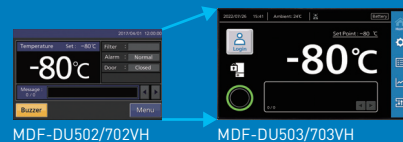

The ergonomic "EZlatch" now coupled with "Electric Lock"

The ergonomically designed "EZlatch" door handle, as the name suggests, allows for secure door opening / closing with minimal force.

Newly added "Electric Lock" automatically unlocks/locks the door keys, making access to stored samples much easier.



Energy efficient performance



Natural refrigerants, compressors and integrated electronics combine to lower operating costs compared to existing models by up to 53%*. Freezer operation is managed by effectively balancing temperature performance and energy management.

* Compared to conventional model (MDF-DU700VH-PE)
Power source: AC 220 V/230 V/240 V 50 Hz, AT 23°C

Intelligent interface



The newly designed control panel with rearranged layout and icons greatly enhances usability. The touchscreen method has also changed from the resistive method to the capacitive method, enabling comfortable use even with lab gloves on.


Various login methods to suit every scenario

1. Password Protection


UP to 100 accounts registrable, each with individual passwords.

2. Face Recognition

Take a picture of your face and register it. Once the camera recognizes you, you will automatically be logged in.

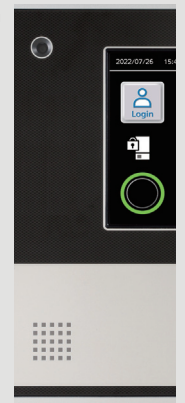


Performance Data

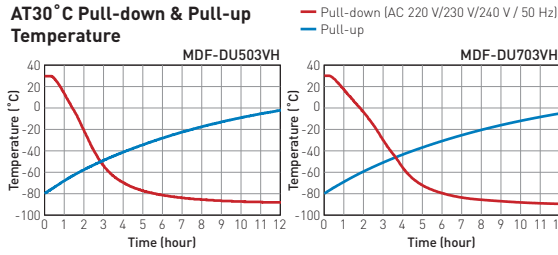

Dimensions

Unit : mm

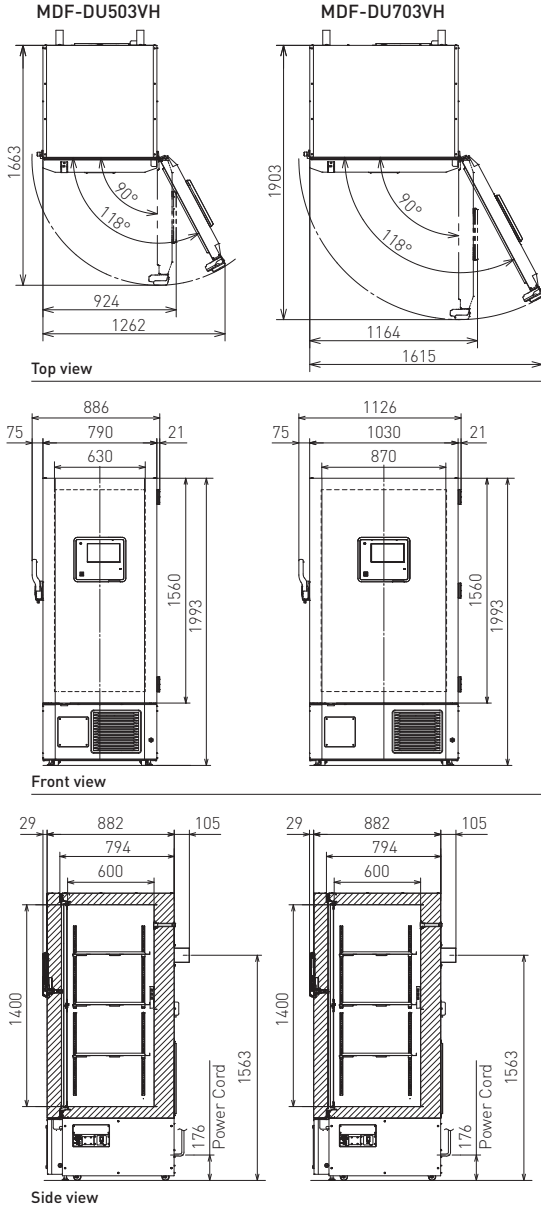

Model Number ⁷⁾	MDF-DU503VH-PE/-PK MDF-DU503VHA-PA	MDF-DU703VH-PE/-PK MDF-DU703VHA-PA	
External dimensions (W x D x H) ¹⁾	mm 790 x 882 x 1993	1030 x 882 x 1993	
Internal dimensions (W x D x H)	mm 630 x 600 x 1400	870 x 600 x 1400	
Volume	litres 528	729	
Net weight	kg 241	276	
Capacity ²⁾	2" boxes 384	576	
Performance			
Cooling performance ³⁾	°C	-86 to -40	
Temperature setting range	°C	-90 to -40	
Temperature control range ³⁾	°C	-86 to -40	
Control			
Controller	Microcomputer control system		
Display	LCD Digital display		
Temperature sensor	Platinum resistance (Pt 1,000 Ω)		
Refrigeration			
Refrigeration system	Cascade		
Compressors	W	High stage side; Hermetic type, Output: 750 W Low stage side; Hermetic type, Output: 750 W	
Refrigerant	HC		
Insulation	Rigid polyurethane foamed-in place + Vacuum insulation panel		
Construction			
Exterior material	Painted Steel		
Interior material	Painted Steel		
Outer door	qty	1	
Outer door lock	Y		
Inner doors	qty	2	
Shelves	qty	3	
Max. load - per shelf	kg	50	
Vacuum release port	1 (automatic)		
Access port	qty	3	
Access port position	3 (back x1, bottom x2)		
Access port diameter	∅ mm	17	
Casters	qty	4 [2 leveling feet]	
Alarms (V = Visual Alarm, B = Buzzer Alarm, M = Message, R = Remote Alarm)			
Power failure	V-B-M-R		
High temperature	V-B-M-R		
Low temperature	V-B-M-R		
Filter	V-M		
Door open	V-B-M		
Electrical and Noise Level			
	MDF-DU503VH-PE MDF-DU703VH-PE	MDF-DU503VH-PK MDF-DU703VH-PK	MDF-DU503VHA-PA MDF-DU703VHA-PA
Power supply	V 220/230/240, 220/230	220	115
Frequency	Hz 50 / 60	60	60
Noise level ⁴⁾	dB (A) 52		
Options			
	MDF-DU503VH-PE/-PK MDF-DU503VHA-PA	MDF-DU703VH-PE/-PK MDF-DU703VHA-PA	
Small inner door kit	set of 5 set of 4	MDF-5ID5-PW ⁵⁾ MDF-5ID4-PW	MDF-7ID5-PW ⁵⁾ MDF-7ID4-PW
Liquid CO ₂ back-up	MDF-UB9-PW		
Inventory rack	IR-224U-PW, IR-316U-PW		
Temperature recorders	- Circular type	MTR-G85C-PE/MTR-G85A-PA ⁴⁾ - Chart paper: RP-G85-PW - Ink pen: PG-R-PW	
	- Continuous strip type	MTR-85H-PW ⁴⁾ - Chart paper: RP-85-PW - Ink pen: DF-38FP-PW - Recorder housing: MDF-S3085-PW	
Recorder sensor cover	MTR-DU700SF-PW		
Optional Communication Systems			
Digital interface (RS232C/RS485)	MTR-480-PW		
Ethernet interface (LAN)	MTR-L03-PW		
Quality Management System			
	MDF-DU503VH-PE / MDF-DU503VHA-PA MDF-DU703VH-PE / MDF-DU703VHA-PA	MDF-DU503VH-PK MDF-DU703VH-PK	
Certification	ISO9001		ISO13485

1) Exterior dimensions of main cabinet only, excluding handle and other external projections.
2) Usable storage capacity of 2" boxes when the original 3 trays installed.
3) Air temperature measured at freezer centre, ambient temperature 30 °C, no load.
4) Nominal value - Background noise 20 dB(A).
5) Installation of small inner door kit may effect usable storage capacity.

6) Requires sensor cover MTR-DU700SF-PW.
7) MDF-DU503VH, MDF-DU703VH are for laboratory use.
• Appearance and specifications are subject to change without notice.
Caution: PHC Corporation guarantees this product under certain warranty conditions. However, please note that PHC Corporation shall not be responsible for any loss or damage to the contents of the product.

TUV SUD ISO 9001
Preservation Equipment, Experimental Environment Equipment, Dispensary Equipment, Culturing Equipment and Drying & Sterilising Equipment for General Laboratory use
The management of the design, development, production and servicing of the above.

TUV SUD EN ISO 13485
Freezers, Refrigerators, Incubators, and Drying and Sterilising Equipment for Medical use
The management of the design, development, production and distribution of the above.

MS JAB CM021
UKAS MANAGEMENT SYSTEMS
EC97J1224 051
PHC Corporation Biomedical Division is certified for:
Environmental management system: ISO14001

PHC Corporation, Biomedical Division 1-1-1 Sakada, Oizumi-machi, Ora-gun, Gunma 370-0596, Japan

DISTRIBUTED BY:



PHC Corporation

<https://www.phchd.com/global/biomedical/>

Printed in Japan 1116-2023-02-AA